

Wascomat Stack & Single Pocket TD Dryers

Wascomat dryers offer reliability, durability, and significant energy savings for self-service laundries.

Wascomat commercial TD dryer models are precision-engineered for efficiency, ease of use, and superior drying results. Your customers will appreciate the fast drying and user-friendly controls. They'll also notice less wear on their clothing. Built to last, Wascomat TD dryers are your best choice for reliability, durability, and customer satisfaction.




Features and benefits:

- Increase your profits per square foot with the TD45x45. Easy installation - 120 volt, single phase.
- Optimal combination of gas consumption (Btu/hr) and airflow (CFM) provides the fastest drying with lowest energy consumption.
- Extra large doors make loading and unloading easy.
- Convenient access to parts.
- Self-cleaning lint screen and large lint compartment for easy maintenance.
- Quiet operation. Our dryers are designed to keep noise level below 70 dB (A).
- Reverse drum operation (option) minimizes tangling and wrinkling, and improves dryer efficiency.

30x30, 45x45, 30, 60 and 77 lb. capacities. Available in stainless or white front panel. Choice of cash card ready system or drop coin.

Excellence in every detail.

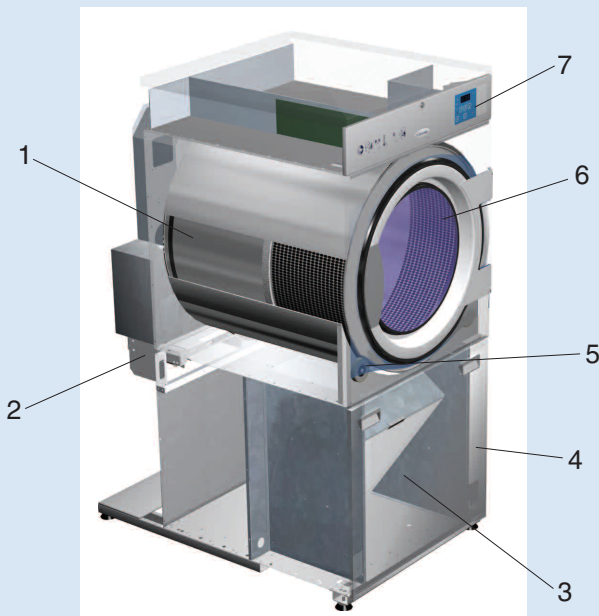

1. Sturdy drum suspension with double-sealed bearings and belt drive.
2. Easy access to parts.
3. Maintenance is minimized with the large lint filter. Lint can easily be removed from the bottom of the compartment.
4. Galvanized panels and powder painted exterior protects against rust and corrosion.
5. Support rollers for increased drum stability and noise reduction.
6. The large door opens nearly 180 degrees and can be hinged to the left or right (on single pocket dryers) for optimal laundry flow. *(Note: On stack dryers - hinge to left must be factory ordered and minimum ordering quantities may apply.)*
7. User-friendly, accurate, and flexible dryer control.

Wascomat Laundry Equipment

1-800-645-2204 • www.wascomat.com

Wascomat — when laundry means business.

Model	TD30X30		TD45x45		TD30		TD60		TD77	
Capacity (lb/kg)	2 x 30	2 x 13.5	2 x 45	2 x 20.41	30	13.5	60	27	77	35
Width (in/mm)	31 1/8	790	34 1/4	870	27 15/16	710	37 13/16	960	37 13/16	960
Depth (in/mm)	43 11/16	1110	52 5/8	1336	44	1120	46 7/16	1180	53 15/16	1370
Depth with door open (in/mm)	72 7/16	1840	85 5/8	2175	71 1/4	1810	83 7/16	2120	90 9/16	2300
Height Overall (in/mm)	76 3/8	1940	81 7/8	2078	74	1880	78 9/16	1995	78 9/16	1995
Height without heating unit (in/mm)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Door opening diameter (in/mm)	22 7/8	580	27	686	22 7/8	580	31 7/8	810	31 7/8	810
Cylinder volume (ft ³ /l)	10.6	300	14.6	414	10.1	286	18.6	527	23	651
Crated Weight (lb/kg)	693	315	865	392	539	245	781	355	792	360
Utility Connections	(2) 8" or (1) 10"									
Exhaust duct diameter (in/mm)	8	200	(2) 203mm or (1) 254mm		8	200	8	200	8	200
Gas connection	1/2 NPT		3/4 MNPT		1/2 NPT		1/2 NPT		3/4 NPT	
Energy Data										
Gas (Btu/hr)	2 x 71,700		2 X 94,000		71,700		136,400		151,200	
Airflow (ft ³ /min / m ³ /hr) (gas heat)	2 x 354	2 x 600	2 x 600	2 x 1020	406	690	683	1160	647	1100
Electric (kW) @ 208-240V/3Ø	2 x 18		n/a		18		30		30	
Airflow (ft ³ /min / m ³ /hr) (elec. heat)	2 x 354	2 x 600	n/a		406	690	624	1060	647	1100
Electrical Requirements										
Current, gas, 120 V/60Hz (full load/circuit breaker)	2 x 9 / 2 x 15		2 x 12 / 2 x 20		5.8/15		8.3/15		16.5/20	
Current, gas, 208-240 V/60Hz/1Ø (full load/circuit breaker)	2 x 4.5 / 2 x 15		2 x 5.4 / 2 x 15		3.4/15		4.2/15		8.3/15	
Current, gas, 208-240 V/60Hz/3Ø (full load/circuit breaker)	n/a		n/a		4.1/15		3.8/15		4.8/15	
Current, electric, 208-240 V/60Hz/3Ø (full load/circuit breaker)	2 x 50 / 2 x 65		n/a		50/65		80/100		89/125	
Alternate Voltages										
Alternate voltages available. Contact Wascomat Sales Department for information.										
Supply Pressures										
Natural Gas (inches H ₂ O/mbar)	6 - 10	15 - 25	6 - 12	15 - 30	6 - 10	15 - 25	6 - 10	15 - 25	6 - 10	15 - 25
Propane (inches H ₂ O/mbar)	10 - 13	25 - 30	11 - 13	28 - 33	10 - 13	25 - 30	10 - 13	25 - 30	10 - 13	25 - 30
Exhaust (inches H ₂ O/mbar) (max)	1.57	3.9	0.6	1.5	0.32	0.8	0.23	0.6	1.30	3.2

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, inverse-time, common-trip, industrial-type circuit breakers ONLY. Warranty void if not properly installed. Advise when placing order if dryers are for installation at altitudes in excess of 1000 feet above sea level, as this may require a gas-orifice change. Contact Laundrylux for more information and availability of machines for electric services not listed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

TD DRYER CONTROL

Wascomat's Selecta II control provides perfect results every time.



Selecta II Coin / Card

- 4 temperature settings.
- Displays remaining drying time.
- Coin, token, debit card compatible.
- Complete diagnostics and service mode.

With more than 100 years of experience behind every machine, Wascomat is renowned for exceptional service and superior products. When you buy Wascomat laundry equipment, you are truly investing in the future of your business.



TD45x45 is CSA certified. Other TD dryers are ETL certified.

Call today for information on the full line of Wascomat washers, dryers, flatwork ironers and low-cost financing and leasing.

Wascomat Laundry Equipment

1-800-645-2204 • www.wascomat.com

Laundrylux • 461 Doughty Blvd., Inwood, N.Y. 11096-0338

Sales and Administration – Tel: 516-371-4400 • Fax: 516-371-4204 • e-mail: sales@laundrylux.com

Spare Parts – Tel: 516-371-2000 • Fax: 516-371-4029 • e-mail: parts@laundrylux.com

Technical Support – Tel: 516-371-0700 • Fax: 516-371-4029 • e-mail: service@laundrylux.com

En Mexico: Llame gratis a este numero 001-800-010-1010

Your local independent authorized dealer

