

Wascomat W Series OPL Washers

Water and energy efficient solid-mount washers for on-premises laundry use.

Wascomat W models have more than 100 years of innovation and experience behind them! Built to last, Wascomat washers use less energy and water, clean more efficiently and are equipped with an easy-to-understand control panel.



Features and benefits:


- Large door opening for fast loading and unloading.
- Hot, Cold, Warm, Delicate and Permanent Press classic wash cycles.
- “Quick disconnect” wire harnesses for easy service.
- Best parts availability and interchangeability across models.
- Unibody construction eliminates welds for superior strength, reliability and durability.

Available in 20, 30, 40, 55 and 75 lb. capacities. Choice of white or stainless steel front panel.



Wascomat W model washers with Classic Control continue our tradition of excellence in technology, design and quality:

1. Option board (located at back of machine) lets you easily change rinse temperature, skip pre-wash, skip first rinse, change mainwash time and change water levels.
2. Stainless steel inner and outer drums.
3. All electrical components, even door lock electronics, are located on top away from water.
4. English/Spanish instruction panel.
5. User-friendly electromechanical control.
6. Easy service front-mounted compact hydraulic drain valve reduces water consumption.

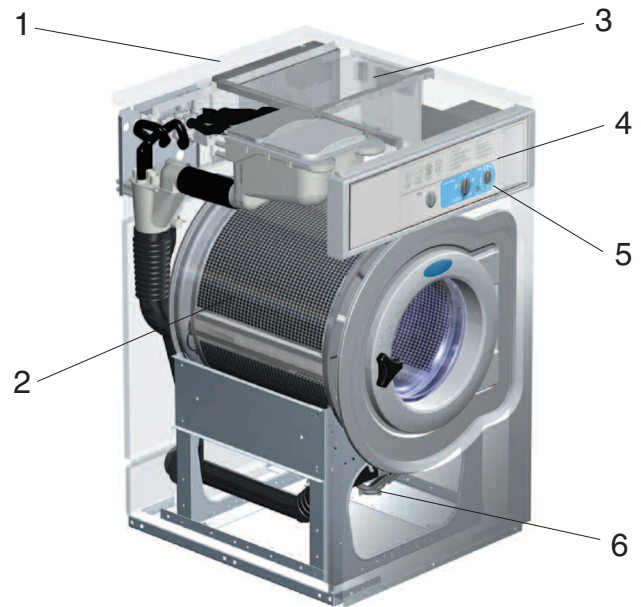

Wascomat washers were first made in 1902. We are renowned for exceptional service and superior products. Parts and technical support are available for virtually every machine ever sold in the United States and Canada through our extensive dealer network. When you buy Wascomat laundry equipment, you are truly investing in your future.

Wascomat Laundry Equipment

1-800-645-2204 • www.wascomat.com


Wascomat — when laundry means business.

Model	W620		W630		W640		W655		W675	
Capacity (lb/kg)	20	8.5	30	13	40	18	55	25	75	34
Width (in/mm)	26	660	28 3/8	720	29 1/2	750	32 11/16	830	35 13/16	910
Depth (overall) (in/mm)	30 1/8	765	32 11/16	830	36	915	39	990	42 5/16	1075
Height (in/mm)	43 7/8	1115	47 1/4	1200	52 3/16	1325	55 1/2	1410	56 7/8	1445
Height to bottom of door (in/mm)	14	355	14 3/8	365	17 1/8	435	19 1/2	495	19 11/16	500
Door opening diameter (in/mm)	12 3/16	310	14 3/8	365	15 9/16	395	17 1/8	435	17 1/8	435
Cylinder volume	3.0	85	4.6	130	6.4	180	8.8	250	11.7	330
Drain outlet diameter (in/mm)	3	75	3	75	3	75	3	75	3	75
Crated weight (lb/kg)	331	150	431	196	528	240	664	302	770	350
Operating Speeds										
Wash (rpm)	52		49		44		44		42	
Extract (rpm/g factor)	528 / 81		494 / 81		471 / 81		446 / 81		427 / 81	
Electrical Requirements (standard)										
Voltage/frequency/phase					208-240/60/3					
Current (Amps) Full-load / Ckt breaker	4.5 / 15		5.5 / 15		7.0 / 15		9.1 / 15		7.1 / 15	
Alternate Voltages										
Alternate voltages are available. Contact the Wascomat Sales Department										
Water Information										
Inlet fittings (* = 3 inlets)	DN20	3/4	DN20	3/4	DN20*	3/4*	DN20*	3/4*	DN20*	3/4*
Flow (gpm/lpm @ 45 psi) (each inlet)	5	20	5	20	5	20	16	60	16	60
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600

For technical information refer to manuals on www.wascomat.com or call 516-371-0700.

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a custom concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Wascomat for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Wascomat assumes no responsibility for errors or omissions in this information.

SUPERIOR WASH RESULTS

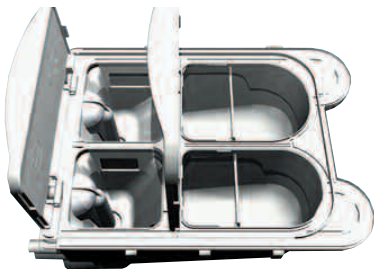

Unique 4-compartment supply dispenser

Conveniently load all supplies (liquid or powder detergents, bleach and fabric softener) before starting the wash. Provision to connect liquid supply injector.



Classic Electromechanical Control

Choice of Hot, Cold, Warm, Permanent Press and Delicate wash cycles. Simple step-by-step operating instructions in English and Spanish. Just select your wash cycle and press start!



Call today for information on the full line of Wascomat washers, dryers, flatwork ironers and low-cost financing and leasing.

Wascomat Laundry Equipment

1-800-645-2204 • www.wascomat.com

461 Doughty Blvd., Inwood, NY 11096-0338

Sales and Administration – Tel: 516-371-4400 • Fax: 516-371-4204 • e-mail: sales@wascomat.com

Spare Parts – Tel: 516-371-2000 • Fax: 516-371-4029 • e-mail: parts@wascomat.com

Technical Support – Tel: 516-371-0700 • Fax: 516-371-4029 • e-mail: service@wascomat.com

En Mexico: Llame gratis a este numero 001-800-010-1010

Your local independent authorized dealer

