

WASCOMAT "SUPER" 140 G-FORCE EMERALD WASHER MODELS

Reliable commercial washers for **COIN LAUNDRIES**

The Wascomat solid-mount, high-extract "Super" Emerald model washers are the ideal choice for any self-service coin laundry. Save water and energy, cut drying time for big gas savings, increase customer flow for more business and provide the best quality wash results.



SU620E / 20 lb. cap. SU630E / 30 lb. cap. SU640E / 40 lb. cap. SU655E / 55 lb. cap. SU675E / 75 lb. cap.

"Super" 140 G-Force Emerald® Washer Models Features and Benefits


- Inverter drive motor for wash or extract speed selection.
- Hooks up to 3 phase or single phase power supply.
- Large door opening for easy loading and unloading.
- Unibody construction eliminates welds for superior strength, reliability and durability.
- Interchangeable parts from one size and model washer to another.

Unique 4-Compartment Supply Dispenser

Accepts liquid or powder detergents, bleach and fabric softener for superior wash results that keep your customers coming back.



- 1 Easy service access.
- 2 Automatic four-compartment supply dispenser.
- 3 UPC compliant venting for backflow prevention.
- 4 Triple-seal, extra heavy-duty bearing and seal system.
- 5 High-grade stainless steel inner and outer drums.
- 6 State-of-the-art riveted, no-weld, galvanized steel base frame prevents weld cracks and rust.
- 7 State-of-the-art, menu-driven microprocessor Emerald® wash cycle control.
- 8 Heavy duty door and hinges designed for heavy use.
- 9 Large door opening for easy loading and unloading.
- 10 Door lock system unlocks immediately at the end of wash cycle.
- 11 Reliable, easy to clean, front accessible, water-operated drain valve reduces water consumption and clogs.

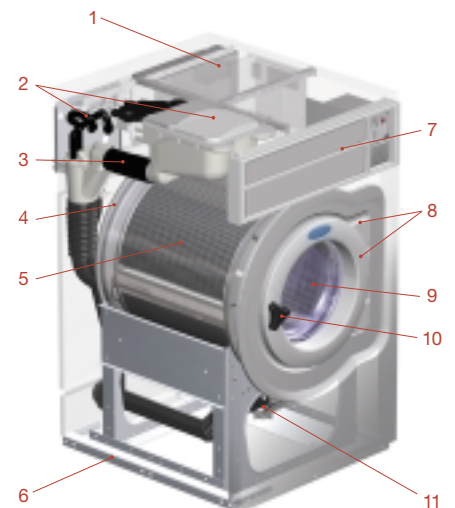

Choice of front panel colors: almond, teal green, white or stainless steel option.

Wascomat Laundry Equipment

The Standard of Quality for Over 100 Years!

Technical Specifications

Model	E620su		E630su		E640su		E655su		E675su	
Capacity (lb/kg)	20	8.5	30	13	40	18	55	25	75	34
Width (in/mm)	26	660	28 3/8	720	29 1/2	750	32 11/16	830	35 13/16	910
Depth (overall) (in/mm)	30 1/8	765	32 1/2	825	36	915	39	990	42 5/16	1075
Height (in/mm)	43 7/8	1115	47 1/4	1200	52 3/16	1325	55 1/2	1410	56 7/8	1445
Crated width - (in/mm)	27 3/16	690	29 1/2	750	30 11/16	780	33 7/8	860	37	940
Crated depth - (in/mm)	32 11/16	830	35 1/16	890	39 3/16	995	43 11/16	1110	47 1/16	1195
Crated height - (in/mm)	48	1219	51 5/16	1304	56 7/16	1434	61 1/4	1556	62 7/16	1586
Height to bottom of door (in/mm)	14	355	14 3/8	365	17 1/8	435	19 1/2	495	19 11/16	500
Door opening diameter (in/mm)	12 3/16	310	14 3/8	365	15 9/16	395	17 1/8	435	17 1/8	435
Cylinder volume (ft ³ /l)	3.0	85	4.6	130	6.4	180	8.8	250	11.7	330
Cylinder diameter (in/mm)	20 1/2	520	23 7/16	595	25 9/16	650	28 9/16	725	31 5/16	795
Cylinder depth (in/mm)	16 5/16	414	18 7/16	468	21 5/16	542	23 7/8	606	26 3/16	665
Drain outlet diameter (in/mm)	3	75	3	75	3	75	3	75	3	75
Height to centerline of drain (in/mm)	3 15/16	100	3 15/16	100	3 15/16	100	3 15/16	100	3 15/16	100
Height to electrical connection (in/mm)	32 1/2	825	35 13/16	910	40 3/4	1035	44 1/8	1120	45 1/2	1155
Height to water connections (in/mm) (approx)	40 9/16	1030	43 7/8	1115	49	1245	52 3/8	1330	53 3/4	1365
Dynamic load (lb/kN)	270+/-585	1.2+/-2.6	382+/-832	1.7+/-3.7	495+/-1057	2.2+/-4.7	630+/-1304	2.8+/-5.8	854+/-1551	3.8+/-6.9
Dynamic frequency (Hz)	11.6		10.8		10.3		9.8		9.4	
Noise level (dBA)	65		72		74		74		74	
Net wt (lb/kg)	300	136	403	183	452	205	622	282	657	298
Crated weight (lb/kg)	331	150	432	196	489	222	666	302	701	318
Operating Speeds										
Wash (rpm)	52		49		44		44		42	
Extract (rpm/G-Force)	694 / 140		649 / 140		619 / 140		587 / 140		561 / 140	
Electrical Requirements (standard)										
Voltage/frequency/phase	208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1		208-240/60/1	
Full-load current (Amps) / Ckt breaker (Amps)	2.7 / 15		3.4 / 15		3.7 / 15		7.3 / 15		7.3 / 15	
Water Information										
Inlet fittings (* = 2 cold inlets)	DN20	3/4	DN20	3/4	DN20*	3/4*	DN20*	3/4*	DN20*	3/4*
Flow (gpm/lpm @ 45 psi) (each inlet)	5	20	5	20	5	20	16	60	16	60
Recommended water pressure (psi/kPa)	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600	30-90	200-600

Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a custom concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact Wascomat for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Wascomat assumes no responsibility for errors or omissions in this information.

Emerald® Control Features and Benefits

- Emerald® wash cycle control provides unique vend price wash cycle selection feature designed to promote coin laundry business automatically any time of day, any day of the week.
- Selection of five wash programs, promotional vend prices plus two additional wash programs: "extra extract" and "quick wash" to maximize washer use and income.
- Simple, user-friendly instruction panel with universal pictograms and step-by-step directions in English and Spanish.



Choice of Drop Coin Meter
or CashCard System.

For more information on the full line of Wascomat washers, dryers and low-cost financing, call Wascomat toll free today.

Wascomat Laundry Equipment

1-800-645-2204 • www.wascomat.com

461 Doughty Blvd., Inwood, L.I., N.Y. 11096-0338
 Sales and Administration – Tel: 516-371-4400 • Fax: 516-371-4204 • e-mail: sales@wascomat.com
 Spare Parts – Tel: 516-371-2000 • Fax: 516-371-4029 • e-mail: parts@wascomat.com
 Technical Support – Tel: 516-371-0700 • Fax: 516-371-4029
 En Mexico: Llame gratis a este numero 001-800-010-1010



Your local independent authorized dealer

